Singer 81-11

PRICE LIST

OF

PARTS



MACHINE NO. 81-11

THE SINGER MANUFACTURING COMPANY

COPYRIGHT, U. S. A., 1916, BY THE SINGER MANUFACTURING CO.

INDEX

	PAGE
Accessories	13
FOOT LIFTER PARTS	13
Iron Base	18
KNEE LIFTER PARTS	14
Machine No. 81-11.	7
Numerical List of Parts	21
Obsolete Parts	19
SPOOL HOLDER	18
Thread Unwinder	18
Under Driver (Ball Bearing)	17
" (OIL CONTROLLING PULLEY)	16

INSTRUCTIONS FOR ORDERING

In ordering from this list, use ONLY the part NUMBER in the FIRST column.

The number stamped on a Sewing Machine part is in every case the number of the single part only.

Every combination of parts sent out as such has its specific number, which, although not stamped on the parts, must be used when ordering the combination.

Each number always indicates the SAME PART in whatever list it appears, or for whatever machine.

The letters after some of the numbers indicate the style of finish only, as follows:

- A. Hardened, Polished and Plated.
- B. Polished and Plated.
- C. Hardened only.
- D. Polished only.
- E. Soft, not Polished.
- F. Hardened and Polished.
- G.
- H. Blued.
- J. Plated only.
- K. Hardened and Plated.
- L. Brass or Gilt.
- M. Oxidized.
- P. Japanned.

These letters MUST BE USED when they appear in the list and AFTER the number as in the list.

In this series

- 1 to 1500 and 50001 to 51500 are Screw Numbers.
- 1501 to 1800 are Nut Numbers.
- 1801 to 2000 are Roller Numbers.
- 2001 to 50000 and 52001 and upward are numbers of Machine Parts.

The figures in the second column refer only to the plates, illustrating the parts, and are NOT TO BE USED in ordering.

Parts marked with an asterisk (*) are furnished only when repairs are made at factory.

LIST OF PARTS COMPLETE

FOR

MACHINE NO. 81-11

FOR CLOSING SELVAGE EDGES OF KNIT FABRICS PRODUCING A FLAT SEAM. NO TRIMMER. TWO-THREAD STITCH. FOOT LIFTER

NO. PLATE	NAME	EACH
*42251	Arm with two each 462c and 42253	12 00
4389 5585	" Dowel Pin	02
949E 5587	" Screw	06
42001 5576	Balance Wheel with 424c and 1354c	1:00
1354c 5587	" Position Screw	.04
424c 5587	" Set Screw	05
42002 5526	Cloth Plate	3 00
42107	Cloth Plate complete, Nos. 42002, 42003,	0 00
	42005, 42108, two 236p and five 229p	6 50
42003 5526	Cloth Plate Extension (lower)	3 00
229р 5587	" " " Screw	02
42108 5526	" " (upper)	20
229p 5587	" " Screw	02
1437p 5587	" " Hinge Screw	10
1655E 5587	" " " Nut	04
42005 5526	" " Lock Spring	15
236р 5587	". " " Screw	02
42205 5588	Feed Bar with 1253c	2 50
42007 5578	" " Hinge Pin	15
1253c 5587	" " Set Screw	03
42008 5578	" Connecting Rod with 42009 and two	
	1057E	60
*42009	Feed Connecting Rod Cap	· —
1057E 5578	" " " Screw	04
1373c 5578	" " Hinge Screw	10
1520c 5578	" " " " Nut	03
42289 5540	" Dog	75
190p 5540	" " Screw	03
42011 5578	" Eccentric with two 453c	1 00
42094 5526	" " Cover	25
42102 5582	" " Holder	2 00
283р 5582	" " " Thumb	
•	Screw	10

NO. PL	ATE	NAME	EΑ	CH
2749 - 55		Eccentric Cover Holder Thumb		
		ew Washer		01
207F 5	,-	Eccentric Cover Screw		02
453c 5		" Set Screw		02
	578 "	Lifting Eccentric with two 462c	1	50
	578 "	" Connection	1	00
462c 5		" Set Screw		02
1374c 5		Regulating Screw Stud		15
1680c 5		" " Nut		06
	578 "	" " Washer		05
42014 5		Regulator with 233p and two 1259c.	1	25
42015 5	578 "	" Connection with 1012E .	1	00
1012E 5	578 - "	" " Adjusting		
	Ser	ew	•	05
1373c 5	578 Feed	Regulator Connection Hinge Screw	٠.	10
1520c 5	578 "	" " " "		
	Nu	t		03
42016 - 53	579 Feed	Regulator Hinge Stud		60
1259c 5	579 "	" Set Screw		03
233р 5	579 "	" Stop Screw		02
42019 5	588 "	Rock Shaft		50
42020 -	- Feed	Rock Shaft complete, Nos. 42019		
		l 42021		85
42021 5	578 Feed	Rock Shaft Crank with 157E		35
157E 5		" " Clamping Screw.		04
	579 "	" " Hinge Pin		25
42079 5	579 "	" " " Bushing		50
1036c 5	579 "	". " " " Set		
		ew		03
42022			12	00
42023 5		Rotary Shaft	2	00
	576 "	" " Bushing (front)	•	35
1036c 5		" " " Set		-
10000		ew		03
42025 5		e Rotary Shaft Crank with 1259c		-
12020 0		1375c	2	00
1375c 5		e Rotary Shaft Crank Position Screw	_	03
1259c 5		" " Set Screw		03
42026 5		" " Flanged Bushing		00
42020 8	370	ck)		60
10005 6				v
42365 5		e Rotary Shaft Flanged Bushing		Δ1
10000	•	ck) Oil Pad (braided cotton) long		01
42366 5		e Rotary Shaft Flanged Bushing		٥.
100	,	ck) Oil Pad (braided cotton) short		01
1036c 5		e Rotary Shaft Flanged Bushing		Λ2 .
	/ha	AIT NOT NOVOWY		112 .

NO. PLATE	NAME 1	EACH
42367 5585	Frame Rotary Shaft Front Bearing Oil	
4.	Pad (braided cotton)\$	01
42193 5588	Frame Side Cover (left) with 19045	25
19045 5585	" " " Handle	05
330⊅ 5587	" " " Screw	02
42028 5526	" " (right) hinged	40
42192 5540	" " Lock Spring	25
330p 5587	" " " " " " "	20
0000,0001	~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~	02
330p 5587	Frame Side Cover (right) Screw	02
42029 5576		
742F 5587	" " Screw	2 50
42194 5540	DOLCW	05
217F 5585	Guide	1 25
	Berew.,	03
7071 5540	wasner	01
42114 5582		2 00
42051 5579	Lever with 209H	3 00
42052 5579	" " Connecting Link	75
378c 5579		
	Hinge Screw	. 10
1520c 5578	Looper (left hand) Lever Connecting Link	-
	Hinge Screw Nut	03
42053 5579	Looper (left hand) Lever Hinge Stud	1 25
1036c 5579	" " " " Set	
	Screw	03
209н 5579	Looper (left hand) Set Screw	02
42166 5582		2 25
42073 5582	" " and Spreader Lever	
		3 50
42074 5582	Looper (right hand) and Spreader Lever	0.00
. 1201 1, 0002	Ball Stud	75
1259c 5579	Looper (right hand) and Spreader Lever	10
12090 0019	Ball Stud Set Screw	
42075 5582	Tam Stud bet berew	03
42075 5582	Looper (right hand) and Spreader Lever	
	Connection with 42059, 42076 and four	
		1 50
*42076	Looper (right hand) and Spreader Lever	
	Connection Cap (lower)	35
1057E, 5578	Looper (right hand) and Spreader Lever	
	Connection Cap (lower) Screw	04
*42059. ——	Looper (right hand) and Spreader Lever	
	Connection Cap (upper)	35
1057E 5578	Looper (right hand) and Spreader Lever	
	Connection Cap (upper) Screw	04
42077 5584	Looper (right hand) and Spreader Lever	-
	Connection Guide	75
• • • • •		

A 11 M

NO. I	PLATE	NAME	EACH
171F	5544	Looper (right hand) and Spreader Lever	
		Connection Guide Screw\$	03
42106	5584	Looper (right hand) and Spreader Lever	
		Connection Oil Tube and Bracket with	1
		29599	50
29599	5584	Looper (right hand) and Spreader Lever	-
		Connection Oil Tube Packing (felt),	
		per 100	25
42078	5584	Looper (right hand) and Spreader Lever	
		Hinge Pin	25
42079	5579	Looper (right hand) and Spreader Lever	
		Hinge Pin Bushing	50
1259c	5579	Looper (right hand) and Spreader Lever	
		Hinge Pin Bushing Set Screw	03
197D	5582	Looper (right hand) Screw	02
42054		Needle Bar	75
42253	5544	" " Bushing	25
462c	5544	" " Set Screw	02
42061	5544	" Connecting Bracket with 187D	
		and 223f	1 00
187D	5544	Needle Bar Connecting Bracket Clamping	
		Screw	02
42055	5544	Needle Bar Connecting Link	1 25
40247	5544	", " " Hinge Pin	05
223 _F	5544	" " " " Set	
		Screw for 42061	02
904c	5544	Needle Bar Connecting Link Hinge Pin	
		Set Screw for 42104	02
42057	5544	Needle Bar Connecting Rod with 42059,	
		42076 and four 1057E	1 50
*42076		Needle Bar Connecting Rod Cap (lower)	35
1057E	5578		
		Screw	04
*42059		Needle Bar Connecting Rod Cap (upper)	35
1057E	5578		
		Screw	04
42077	5584	Needle Bar Connecting Rod Guide	75
	5544	" " " " " "	
2.22	30.11	Screw	03
42103	5544	Needle Bar Crank (back) with 1258c and	
	JUII	two 1259c	75
42074	5589		75
1259c		" " " " " Set	10
1409C	9918	Screw	03
1050	EE70	Needle Bar Crank (back) Position Screw.	03
1259c		" " Set Screw	
1258c	าว44	Set Screw	02

NO. PLATE	NAME	EACH
42104 5544	Needle Bar Crank (front) with 904c,	
12101 0011	1258c and 1259c\$	75
1259c 5579	Needle Bar Crank (front) Position Screw.	03
1258c 5544	" " Set Screw	02
42105 5544	" " Shaft	50
42115 5544	" " Thread Retainer Bracket	75
228p 5544	" " " " Screw	02
10106 5544	Needle Bar Thread Retainer Disc	03
93H 5544	" " Screw	04
10107 5544	" " Spring	01
1629c 5544	" Clamping Nut	05
42066 5544		40
42195 5588	" Guard	
1101c 5587	" " Holder	3 00
171F 5544	DCI GW	10
	Strew	03
72130	Presser Foot Body	3 50
9320 5585	ringe rinper 100	10
12101	r 124.0e	2 00
14058 5585	Spring	02
42160 5585	Adjusting rm	.05
464c 5587	Set	
10100 5510	Screw	02
42198 5540	Presser Foot (spring hinged) complete,	
	Nos. 464c, 9320, 14058, 42160, 42196	
1004	and 42197	4 65
1324c 5587	Presser Foot Screw	05
39541 5586	washer	05
42069 5576	Lever	2 50
42045 5582	" Hinge Stud	50
1120c 5582	bet berew	03
42070 5584	Litter	20
85D 5584	Hinge Screw	05
1377c 5584	Screw Stud (eccentric)	10
1547D 5584	Nut	03
42071 5584	opring	05
1378D 5584	Pressure Regulating Thumb Screw	10
42072 5584	Spreader	2 50
197р 5582	" Screw	02
2102 5585	Tension (looper, left hand) Disc	05
1560c 5585	" " Regulating	
	Thumb Nut	04
828c 5585	Tension (looper, left hand) Screw Stud	08
10148 5585	" " " Spring	03
2102 5585	" (looper, right hand) Disc	05
1560c 5585	" " " Regulating	
	Thumb Nut	04
828c 5585	Tension (looper, right hand) Screw Stud.	08

•								
NO.	PLATE		N.	AME			*	EACH
10148	5585	Tension	ı (looper	, righ	t han	d) Sp	ring	\$.03
17547	5585.		"	"	"	Thi	ead Guide	25
2102	5585	"	(needle	threa	id) D	isc		05
1560	c 5585						lating	
		Thur	nb Nut.				<i></i>	04
916	c. 5585	Tension	n (needle	thre	ad) So	erew S	Stud	08
10148	5585	46	"	"	Sr	ring.		. 03
42082	5585	"	**	"	T	hread	Guide	50
42083	5585	Thread	(looper,	left l	and)	Eyele	et.:	40
2331	D 5579	. "	"	"	"	"	Screw	02
42084	5585.		"	44	"	Tube		30
462	c. 5544.	."	. "	"	46	"	Set Screw	02
42093	5585 .	." .	(looper,	right	hand) Sta	ple	∴ 50
1901	b 5540.		. "	46	. "	. 46	Screw.	03
42127	5585	"		"	. "	Tak	e-up	35
1971	F 5582	46	. "	"	44		" Screw	02
42096	5585	. "	(needle)	Eyel	et			25
2171	F 5585:	"	"	"	Ser	rew		03
42128	. 5588.	. ".	44	Tak	e-up.			50
1971	F 5582	".	. 44	41	' §	crew.		02
42199	5540	Throat	Plate for	r 4228	39			1 35
7421	5587	. "	" Sc	rew			<i></i>	05
								3

	IKUN BASE	
NO. PLATI	NAME -	EACE
42086 5564	1¼ in. No. 12 and four each 935D, 4718	
45to ##0	and 42088	
4718 - 5586		01
42088 5586		02
935D 5586	Screw	04
X	100500000	
***	ACCESSORIES	
NO. PLATE		EACH
1407E 5563	Machine Base Thumb Screw, for 3 in. table\$	
1408E 5563	Machine Base Thumb Screw, for 2 in.	
14063 5586		10
9842 5586		
0000	Washer	02
36563 - 5566	Oiler (copper plated) with 36564	12
36564 5566	,	06
26151 5566	Screw Driver	10
	Threading Wire.	03
	Tweezers, 6 in	. 40
42089 5566	Wrench for 1324, 1374 and 1629	10
8908 5566		08
4822 5566	" " 1547	05
• • • • • • • • • • • • • • • • • • • •		P.
FO	OT LIFTER PARTS	
NO. PLATE	NAME	EACH
6439	Chain, 36 in. to 45 in	. 20
Note.	When ordering No. 6439 give length required.	
4879 5566	Chain Connecting Link	03
42130 5586		75
42131 5586		40
. 1229c 5586	" " Screw	04
1301d 5586	" Hinge Screw	12
42132 5586		03
1148г 5586	" Stop Screw	05
1547р 5584	214011111111	03
4881 5564		30
4882 5566	" Shaft	05

NO.	PLATE	NAME	EACH
4883	5566	Treadle Spring\$	10
4884	5564	" Stand	25
4885	5564	Treadle complete, Nos. 4879, 4881 to 4884	
		and two wood screws 1 in. No. 16	75
42133		Foot Lifter complete, Nos. 1301p, 4885,	
		6439, 42130 to 42132 and two each	
		1148F, 1229c and 1547p	2 50
			•
	KN	EE LIFTER PARTS	
NO.	PLATE	NAME	EACH
42130	5586	Lifting Lever\$	75
42131	5586	" " Bracket	40
1229c	5586	" " Screw	04
42142	5564	" Connecting Rod	05
1301r	5586	" " Hinge Screw	12
42132	5586	" " Spring	03
1148r	5586	" Stop Screw	05
15471	5584	" " " Nut	03
2763	5564	Rock Shaft	. 10
12242	5564	" " Hanger with two wood screws	
		1 in. No. 10	08
2765	5564	Rock Shaft Knee Arm	10
2766	5564	" " " Hub with 356c	15
3560	5587	" " " Set Screw	. 06
2768		Rock Shaft Knee Arm complete, Nos.	
		2765 to 2767	40
2767	5564	Rock Shaft Knee Plate with 356c	18
3560	5587	" " " Set Screw	06
6337	5564	" Lifting Bracket with two 356c	20
7125	5564	" " " Hook	15
3560	5587	" " Set	
		Screw	06
3560	5587	Rock Shaft Lifting Bracket Set Screw	06
2770	5564	" Stop Dog with 356c	12
3560	5587	" " " Set Screw	06
42143	5564	Rock Shaft complete, Nos. 2763, 2768,	
		6337, 7125 and two each 2770 and 12242	1 25
42144		Knee Lifter complete, Nos. 1301p, 42130	
		to 42132, 42142, 42143 and two each	
		1148F, 1229c and 1547D	2 75

SPOOL HOLDER

NO.	PLATE			NA	ME			EA	CH
41393	5570	Spool	Holder	Brack	cet wi	ith two	o 1143c\$	1	00
41394	5570	u	ш				<i>.</i>		25
41395	5570	* **	"	"			d		10
11430	2641	44	44	"	"	"	Set Screw		03
8064	—	**	"	66	Cone		<i>.</i>		07
41396	5570	ш	46	"	**	8064	with 193c.		10
1930	5587	"	66	"	"	Set S	crew.,		03
41397	5570	Spool	Holder	compl	lete, I	Nos. 4	1393, 41394		
							and wood		
1.5		scre	ws 11/4	in No	. 12.	:		1	75

THREAD UNWINDER

FOR THREE LARGE SPOOLS OR THREE LARGE CONES OF THREAD

NO. PLATE	NAME. E	ACH
27623 5571	Spool Pin	08
155c 5587	" " Set Screw	03
41434 5571	// TS /	40
41435	" " 41434 with 1149c and three	
art of the	each 155c and 27623	75
1149c 5587	Spool Rest Set Screw	04
27940 5571	" Stand with 453c	20
41514 5571	// *** 1	15
41515 5586	" Centre Pin	05
27739 5571	671 1 64 1	05
41632 5571	"Guard with 208E and three 41569	40
41569 5586	" Eyelet	02
41637 5571	" Rod (lower)	10
41638 5571	" " (upper)	15
41639 5571	" " Coupling with two	
	456c	20
456c 5587	Thread Guard Rod Coupling Set Screw.	02
41640	Thread Guard Rod complete, 30 in. long,	
	Nos. 41637 to 41639	45
453c 5578	Thread Guard Rod Set Screw	02
208E 5587	" Screw	02
41438 5571	Thread Unwinder complete, Nos. 27940,	
	41435, 41632, 41640 and three each	
· :	27739, 41514 and wood screws 1 in.	
	NT 40	30

UNDER DRIVER

LEVER PRESSURE, THREE SPEED, RIGHT HAND (OIL CONTROLLING PULLEY)

NO. PLATE	NAME	EACH
27508 362	Belt Guard\$	- 08
649E 5587	" " Screw	05
27509 362	Cone Pulley (grooved) three speed, 2½ in.,	
	3¾ in. and 5¼ in. diam., with 27473	60
27473 1101	Cone Pulley Centre Bearing	08
27474 363	Dress Guard (right hand)	08
138E 1101	" " Screw	05
27630 362	Driving Pulley (grooved) 6 in. diam., with	
	433c, 27598 and two 7958	60
27598 ——	Driving Pulley Friction Ring (leather)	05
7958 2642	" " Stop Pin	01
27631 1101	" " Hollow Stud with 27600	15
27600 1101	" " " Position Stud	02
356c 5587	" Set Screw	06
27632	" " " Wick	01
27633	" " " Wire	
	with 27632	05
433c 1101	Driving Pulley Screw Centre Bearing	08
7958 2642		
	Dowel Pin	01
27634 362	Frame	60
41338 362		25
27483 1101	" Brake Spring	02
27497 1101	" Strip (leather)	02
12178 1101	" Centre Plug (wood)	01
427E 1101	" " Adjusting Screw	. 08
1508E 1101	" " " Nut	06
27485 1101	" Hinge Pin	01
27635 362	Oil Cup	25
127E 5587	" " Screw	04
27070 363	Shaft Driving Pulley (sectional, grooved)	
	10 in. diam., $1\frac{3}{16}$ in. bore, with two 597c	45
597c 2642	Shaft Driving Pulley Clamping Screw	. 08
27636 363	Treadle	30
9082 1101	" Bearing Cotter Pin	01
27637 362	" Pitman Rod (lower)	05
27638 1101	" " " Spring	03
27639 362	" " (upper)	05
9079 362	" " Clamp with 354c	12
354c 1101	" " " Screw	06

NO.	PLATE	NAME	EACH
27640	362	Treadle Pitman complete, Nos. 2762, 9079	
		and 27637 to 27639\$	35
2878	363	Treadle Stand	15
2762		" Stop Collar with 362F	10
	F. 2642	" " Set Screw	05
27642		Treadle complete, Nos. 2878, 9082, 27636	
2,012		and four wood screws 1 in. No. 16	45
27643		Treadle and Pitman complete, Nos. 27640	
2,010		and 27642	80
27644		Transmitter complete for 27645, Nos.	
21011		138E, 356c, 427E, 649E, 1508E, 12178,	
4		27474, 27483, 27485, 27497, 27508,	
		27509, 27630, 27631, 27633 to 27635,	
		41338, two 127E and four wood screws	
		1½ in. No. 16	3 00
27648		Under Driver, lever pressure, three speed,	
21030	, —-	right hand (oil controlling pulley) com-	
		plete, Nos. 27070, 27643 and 27644	4 00
		proto, 1100 21010, 21010 and 21010	

UNDER DRIVER

(BALL BEARING)

LEVER PRESSURE, TWO SPEED, RIGHT HAND

NO. PLATE	NAME	EACH
27750 2640	Cone Pulley (grooved) two speed, 3¾ in.	
21150 2010	and 5¼ in. diam., with 8780 and 12459	\$ 60
25303 2641	Cone Pulley Ball, size ¼ in per 100	1 00
	" " Bearing Adjusting Ring	15
21100 -01-	" " " " " "	
1143c 2641	***	00
	Set Screw	03
27795 2641	Cone Pulley Ball Bearing Adjusting Ring	
	Set Screw Washerper 100	25
878D 2641	Cone Pulley Oil Hole Stop Screw	06
12459 2641	" " " " Washer	
12403 2011	(leather)per 100	50
27755 2640	Dress Guard (right hand)	10
_,,,,,	" " Screw	06
348E 2642	· · · · · · · · · · · · · · · · · · ·	01
2718 2642	tt domer	01
27756 2640	Driving Pulley (grooved) 6 in. diam., with	
	315c, 7958 and 27598	60
27598	Driving Pulley Friction Ring (leather)	05
7958 2642	" " " Stop Pin	01
315c 2642	" Set Screw	04
27757 2641	" " Shaft	60
_,,,,,	" " Ball, size ¼ in.,	
25303 2641	per 100	1 00

NO.	PLATE	NAME	EACH
27751	2641	Driving Pulley Shaft Ball Bearing Collar	S. 25
27752	2641	" " " " " " "	ψ 20
		Pin	04
27758	2641	Driving Pulley Shaft Ball Safety Washer.	01
27759	2641	" " Screw Bearing Ball	VI.
		Case (left)	: 20
27760	<u> </u>	Driving Pulley Shaft Screw Bearing Ball	- 20
		Case (left) complete, Nos. 27758, 27759,	
		27761 to 27763 and twelve 25303	50
27761	2641	Driving Pulley Shaft Screw Bearing Ball	90
		Case (left) Friction Stud	10
25303	2641	Driving Pulley Shaft Screw Bearing Ball	10
		Case (left) Friction Stud Ball, size 1/4 in.,	
		per 100	1 00
27762	2641	Driving Pulley Shaft Screw Bearing Ball	1 00
		Case (left) Friction Stud Ball Plate	05
27763	2641	Driving Pulley Shaft Screw Bearing Ball	UĐ
	-011	Case (left) Friction Stud Ball Plate	
		Washer	01
27754	2641	Driving Pulley Shaft Screw Bearing Ball	01
	-011	Case (left) Friction Stud Extension	-
		Pin	02 '
1122c	2641	Driving Pulley Shaft Screw Bearing Ball	04
11220	2011	Case (left) Set Screw	03
27764	2641	Driving Pulley Shaft Screw Bearing Ball	03
	2011	Case (right)	20
27765		Driving Pulley Shaft Screw Bearing Ball	20
		Case (right) complete, Nos. 27758, 27764	
		and eight 25303	30
1122c	2641	Driving Pulley Shaft Screw Bearing Ball	30
		Case (right) Set Screw	03
27766	2640	Frame with two 1122c	75
27767	2640	Lever with 27768 and two 27878	35
1093c	2642	" Adjusting Screw	10
1513E	2642	" " Nut	05
27768	2642	" Brake (leather, two pieces)	03
27878	2642	" " Rivet	01
1092E	2642	" Hinge Screw	20
1507E	2642	" " Nut	05
27769	2642	" Spring	10
27070	363	Shaft Driving Pulley (sectional, grooved)	
		10 in. diam., $1\frac{3}{16}$ in. bore, with two 597c	45
597c	2642	Shaft Driving Pulley Clamping Screw	08
27636	363	Treadle	30
9082	1101	" Bearing Cotter Pin	01
27637	362	" Pitman Rod (lower)	05
27638	1101	" " " Spring	03

-		•	
NO.	PLATE	NAME	EACH
27639	362	Treadle Pitman Rod (upper)\$	05
9079	362	" " Clamp with 354c	12
	1101	" " Screw	06
27640		'Treadle Pitman complete, Nos. 2762, 9079	5
2.020	JU <u>-</u>	and 27637 to 27639	35
2878	363	Treadle Stand	15
2762		" Stop Collar with 362r	10
362		" " Set Screw	05
27642		Treadle complete, Nos. 2878, 9082, 27636	
21034		and four wood screws 1 in. No. 16	45
27643	·	Treadle and Pitman complete, Nos. 27640	
21010		and 27642	80
27770		Transmitter complete, Nos. 348E, 1092E,	•
2(110		1093c, 1507E, 1513E, 2718, 27750 to	
		27752, 27754 to 27757, 27760, 27765 to	
		27767, 27769, two each 1143c, 27753,	
		27795, three wood screws 2 in. No. 16	
		and twenty-two 25303	3 00
0555		Under Driver (ball bearing) lever pressure,	•
2777		two speed, right hand, complete, Nos.	
		27070, 27643 and 27770	4 00
		21010, 21040 and 21110	- 00

OBSOLETE PARTS

NO.	PLATE	NAME	EA	сн	
42191	5540:	Feed Dog\$		75	
42091	5584	Looper (right hand) use 42166	2	25	
42092	5585	Thread (looper, right hand) Eyelet, use			
		42127		45	

NUMERICAL LIST OF PARTS

	NAME	EACH
NO. PLATE	Presser Lever Lifter Hinge Screw\$	
85p 5584	Needle Bar Thread Retainer Screw	04
93н 5544	Under Driver Oil Cup Screw for 27644	04
127E 5587 138E 1101	" " Dress Guard Screw for	01
138E 1101	27644	05
155c 5587	Thread Unwinder Spool Pin Set Screw for	
1990 9991	41435	03
157E 5578	Feed Rock Shaft Crank Clamping Screw	
191E 9910	for 42021	04
171F 5544	Looper (right hand) and Spreader Lever	
1715 0011	Connection Guide Screw	03
171F 5544	Needle Bar Connecting Rod Guide Screw	03
171F 5544	" Guard Screw	03
187p 5544	" Bar Connecting Bracket Clamping	
1012 0011	Screw for 42061	02
190р 5540	Feed Dog Screw	03
190p 5540	Thread (looper, right hand) Staple Screw.	.03
193c 5587	Spool Holder Shaft Cone Set Screw for	
	41396	03
197p 5582	Looper (right hand) Screw	02
197p 5582	Spreader Screw	02
197 _F 5582	Thread (looper, right hand) Take-up Screw	02
197F 5582	" (needle) Take-up Screw	02
207F 5587	Feed Eccentric Cover Screw	02
208E 5587	Thread Unwinder Thread Guard Screw	
	for 41632	02
209н 5579	Looper (left hand) Set Screw for 42051	02
217г 5585	Guide Screw	03
217F 5585	Thread (needle) Eyelet Screw	03
223г 5544	Needle Bar Connecting Link Hinge Pin	20
*.	Set Screw for 42061	02
228р 5544		00
	Screw.	02
229д 5587		02
	42107	02
229р 5587	·	02
	42107	02
233p 5579		02
233p 5579		02
236р 5587		02
283D 5582		. 10
	Screw	0

NO. PLATE	NAME	EACH
315c 2642		
	for 27756	04
330p 5587	a - a - a - a - a - a - a - a - a - a -	02
330р 5587	() 20201111111111111111111111111111111111	02
330p 5587 348E 2642	(right) Screw	02
343E 2042	Under Driver Dress Guard Screw for 27770	06
354c 1101		00 .
	Screw for 9079	06
356c 5587		•
	2766	06
356c 5587		06
356c 5587		
	Screw for 6337	06
356c 5587	Small Entering Establish Set Scient 101	
	6337	06
356c 5587	Discourse of the property of t	06
356c 5587		
	Set Screw for 27644	06
362r 2642		
050 · FEEO	Screw for 2762	05
378c 5579		10
424c 5587	Hinge Screw	10
424C 5587 427E 1101		05
427E 1101	Under Driver Lever Centre Plug Adjust- ing Screw for 27644	. 00
433c 1101	Under Driver Driving Pulley Screw	- 08
1000 1101	Centre Bearing for 27630	08
453c 5578		02
453c 5578		04
-000 0010	Screw for 27940	02
456c 5587	Thread Unwinder Thread Guard Rod	V2 .
	Coupling Set Screw for 41639	02
462c 5544	Feed Lifting Eccentric Set Screw for 42012	02
462c 5544	Needle Bar Bushing Set Screw for 42251.	02
462c 5544	Thread (looper, left hand) Tube Set Screw	02
464c 5587	Presser Foot Spring Adjusting Pin Set	
	Screw for 42198	02
597c 2642	Under Driver Shaft Driving Pulley	
	Clamping Screw for 27070	08
649E 5587	Under Driver Belt Guard Screw for 27644	05
742F 5587	Frame Top Cover Screw	05
742F 5587	Throat Plate Screw	05
828c 5585	Tension (looper, left hand) Screw Stud	08
828c 5585	" (looper, right hand) Screw Stud.	08

NO. PLATE	NAME	EACH
878p 2641	Under Driver Cone Pulley Oil Hole Stop	
	Screw for 27750\$	06
904c 5544	Needle Bar Connecting Link Hinge Pin	02
010 - 5505	Set Screw for 42104 Tension (needle thread) Screw Stud	02
916c 5585 935p 5586	Machine Cushion Screw for 42086	04
949E 5587	Arm Screw	06
1012E 5578	Feed Regulator Connection Adjusting	
	Screw for 42015	05
1036c 5579	Feed Rock Shaft Hinge Pin Bushing Set	
	Screw	03
1036c 5579	Frame Rotary Shaft Bushing (front) Set	09
1000- 5570	Screw	03
1036c 5579	(back) Set Screw	03
1036c 5579	Looper (left hand) Lever Hinge Stud Set	
10000 0010	Screw	03
1057E 5578	Feed Connecting Rod Cap Screw for	
	42008	04
1057E 5578	Looper (right hand) and Spreader Lever	
	Connection Cap (lower) Screw for 42075	0 4
1057E 5578	Looper (right hand) and Spreader Lever	
	Connection Cap (upper) Screw for 42075	04
1057- 5570	Needle Bar Connecting Rod Cap (lower)	04
1057E 5578	Screw for 42057	04
1057E 5578	Needle Bar Connecting Rod Cap (upper)	
10012 0010	Screw for 42057	04
1092E 2642	Under Driver Lever Hinge Screw for	
	27770	20
1093c 2642	Under Driver Lever Adjusting Screw for	
	27770	10
1101c 5587	Needle Guard Holder Screw	10
1120c 5582	Presser Lever Hinge Stud Set Screw	03
1122c 2641	Under Driver Driving Pulley Shaft Screw	
	Bearing Ball Case (left) Set Screw for 27766	03
1122c 2641	Under Driver Driving Pulley Shaft Screw	00
11220 2041	Bearing Ball Case (right) Set Screw for	
•	27766	. 03
1143c 2641	Spool Holder Shaft Centre Stud Set Screw	
	for 41393	03
1143c 2641	Under Driver Cone Pulley Ball Bearing	
	Adjusting Ring Set Screw for 27770	03
1148r 5586	Lifting Lever Stop Screw for 42133 and	
51	42144	05

NO. PLATE	NAME	EACH				NO. I	LATE	- NAME	EACH
1149c 5587	Thread Unwinder Spool Rest Set Screw		• •			1520c	5578	Looper (left hand) Lever Connecting Link	
11100 0001	for 41435	04		f			, -	Hinge Screw Nut\$	03
1229c 5586	Lifting Lever Bracket Screw for 42133 and	. 01	-	:		1547D	5584	Lifting Lever Stop Screw Nut for 42133	
12200 0000	42144	04			**			and 42144	03
1253c 5587	Feed Bar Hinge Pin Set Screw for 42205.	03				1547p	5584	Presser Lever Screw Stud Nut	03
	Needle Bar Crank (back) Set Screw for	. 00				1560c		Tension (looper, left hand) Regulating	
22000 0022	42103	02						Thumb Nut	04
1258c 5544	Needle Bar Crank (front) Set Screw for					1560c	5585	Tension (looper, right hand) Regulating	
22000 0022	42104	02				20000		Thumb Nut	. 04
1259c 5579	Feed Regulator Set Screw for 42014	03				1560c	5585	Tension (needle thread) Regulating	
	Frame Rotary Shaft Crank Set Screw for					10000	0000	Thumb Nut	04
	42025	03	:			1629c	5544	Needle Clamping Nut	05
1259c 5579	Looper (right hand) and Spreader Lever		•			1655E		Cloth Plate Hinge Screw Nut	04
	Ball Stud Set Screw for 42073	. 03				1680c		Feed Regulating Screw Stud Nut	06
1259c 5579	Looper (right hand) and Spreader Lever				100	2102	5585	Tension (looper, left hand) Disc	05
	Hinge Pin Bushing Set Screw	03				2102	5585	" (looper, right hand) Disc	05
1259c 5579	Needle Bar Crank (back) Ball Stud Set			4		2102	5585	" (needle thread) Disc	05
	Screw for 42103	03		.	1	2718	2642	Under Driver Dress Guard Screw Washer	
1259c 5579	Needle Bar Crank (back) Position Screw		•			2.10		for 27770	01
	for 42103	03	1.0	•		2749	5582	Feed Eccentric Cover Holder Thumb	
1259c 5579	Needle Bar Crank (front) Position Screw			, a		21110	0002	Screw Washer	01
	for 42104	03		2 2		2762	9649.	Under Driver Treadle Stop Collar with	
1301D 5586	Lifting Lever Hinge Screw for 42133 and					2102	2032	362r, for 27640	10
	42144	12				2763	5564	Rock Shaft for 42143	10
1324c 5587	Presser Foot Screw	, 05				- 2100	OOUT		
1354c 5587	Balance Wheel Position Screw for 42001.	04					•	Nos. 2765 to 2767 for 2768.	
1373c 5578	Feed Connecting Rod Hinge Screw	10				2765	5564	Rock Shaft Knee Arm	10
1373c 5578	" Regulator Connection Hinge Screw.	10				2766	5564	" " " Hub with 356c	15
1374c 5578	" Regulating Screw Stud	15				2767	5564	" " Plate with 356c	18
1375c 5579	Frame Rotary Shaft Crank Position					2768		Rock Shaft Knee Arm complete for 42143,	
	Screw for 42025	. 03				2100	-	Nos. 2675 to 2767	40
1377c 5584	Presser Lever Screw Stud (eccentric)	10				0770	FFCA		12
1378p 5584	Pressure Regulating Thumb Screw	10				2770	5564	Under Driver Treadle Stand for 27642	15
1407E 5563	Machine Base Thumb Screw, for 3 in. table					2878	363		02
	(Accessories)	. 30				4389	5585	Arm Dowel Pin	01
1408E 5563	Machine Base Thumb Screw, for 2 in. table			•		4718	5586	Machine Base Cushion (felt) for 42086	05
	(Accessories)	25				4822	5566	Wrench for 1547 (Accessories)	03
1437р 5587	Cloth Plate Hinge Screw	10				4879	5566	Chain Connecting Link for 4885	. 00
1507E 2642	Under Driver Lever Hinge Screw Nut for							Nos. 4881 to 4884 for 4885.	
	27770	05				4001	ww0.4	Treadle	30
1508E 1101	Under Driver Lever Centre Plug Adjust-			· ·		4881	5564		05
	ing Screw Nut for 27644	:06	· · ·	* *		4882	5566	" Shaft	10
1513E 2642	Under Driver Lever Adjusting Screw Nut					4883	5566	" Stand	25
	for 27770	05				4884	5564	COMMICE	20
1520c 5578	Feed Connecting Rod Hinge Screw Nut.	03	4,	\$		4885	5564	Treadle complete for 42133, Nos. 4879, 4881 to 4884 and two wood screws 1 in.	
1520c 5578	" Regulator Connection Hinge Screw	00		į .				No. 16	75

NO.	PLATE	NAME	EACH		_	-	NO.	PLATE	NAME	EACH
6337	5564	Rock Shaft Lifting Bracket with two 356c.				1	27070	363	Under Driver Shaft Driving Pulley	
		for 42143\$	20						(sectional, grooved) 10 in. diam., 1 3 in.	
6439	-	Chain, 36 in. to 45 in., for 42133	20						bore, with two 597c, for 27645 and	
7071	5540	Guide Screw Washer	01						27771\$	45
7125	5564	Rock Shaft Lifting Bracket Hook for					27473	1101	Under Driver Cone Pulley Centre Bearing	
		42143	. 15						for 27509	08
7958	2642	Under Driver Driving Pulley Friction			*		27474	363	Under Driver Dress Guard (right hand)	
		Ring Stop Pin for 27630 and 27756	01						for 27644	08
7958	2642	Under Driver Driving Pulley Screw Centre					27483	1101		
		Bearing Dowel Pin for 27630	01				05405		27644	02
8064		Spool Holder Shaft Cone for 41396	07				27485		Under Driver Lever Hinge Pin for 27644.	01
8908	5566	Wrench for 1520 and 1655 (Accessories).	08				27497	1101	" " Brake Strip (leather)	00
9079	362	Under Driver Treadle Pitman Rod Clamp	,				27508	362	for 27644	02
		with 354c, for 27640	12	ı	4 ±		27509	362	" " Cone Pulley (grooved) three	08
9082	1101	Under Driver Treadle Bearing Cotter Pin					21005	502	speed, $2\frac{1}{2}$ in., $3\frac{3}{4}$ in. and $5\frac{1}{4}$ in. diam.,	
		for 27642	01						with 27473, for 27644	60
9320	5585	Presser Foot Hinge Pin for 42198, per 100	10	-	u ji		27598		Under Driver Driving Pulley Friction	00
9842	5586	Machine Base Thumb Screw Spring	10.						Ring (leather) for 27630 and 27756	05
	0000	Washer (Accessories)	02				27600	1101	Under Driver Driving Pulley Hollow Stud	
10106	5544	Needle Bar Thread Retainer Disc	03						Position Stud for 27631	02
10107	5544	" " " Spring	01				27623	5571	Thread Unwinder Spool Pin for 41435	08
10148	5585	Tension (looper, left hand) Spring	03				27630	362	Under Driver Driving Pulley (grooved) 6	
10148	5585	" (looper, right hand) Spring	03						in. diam., with 433c, 27598 and two	
10148		" (needle thread) Spring	03						7958, for 27644	60
12178		Under Driver Lever Centre Plug (wood)	00				27631	1101	Under Driver Driving Pulley Hollow Stud	
12110	1101	for 27644	01	*				•	with 27600, for 27644	15
12242	5564	Rock Shaft Hanger with two wood screws	. 01				27632		Under Driver Driving Pulley Hollow Stud	~-
12270	9903	1 in. No. 10, for 42143	08						Wick for 27633	01
12459	2641	Under Driver Cone Pulley Oil Hole Stop	00				27633		Nos. 27633 to 27635 For 27644.	
12100	2011	Screw Washer (leather) for 27750,					21000		Under Driver Driving Pulley Hollow Stud Wick Wire with 27632	٥ĸ
		per 100	50				27634	362	Under Driver Frame	05 60
14058	5585	Presser Foot Spring for 42198	02				27635	362	" " Oil Cup	25
14063	5586	Machine Base Thumb Screw Spring	. 02		:		27636	363	" " Treadle for 27642	30
14000	0000	(Accessories)	10							
17547	5585	Tension (looper, right hand) Thread Guide	25		•				Nos. 27637 to 27639 for 27640.	
19045	5585	Frame Side Cover (left) Handle for 42193	05	₹,			27637	362	Under Driver Treadle Pitman Rod (lower)	05
25303			UĐ	4.5		1	27638	1101	<i>" " " " " " " " "</i>	
20000	2011	Under Driver Cone Pulley Ball, size ¼ in., for 27770per 100	1.00		1.		1		Spring	03
25303	2641	- · · · · · · · · · · · · · · · · · · ·	1 00		100		27639	362	Under Driver Treadle Pitman Rod (upper)	05
20000	2041	J	1 00		4 1 %		27640	362	Under Driver Treadle Pitman complete for	
25209	9641	size ½ in., for 27760 and 27765, per 100	1 00						27643, Nos. 2762, 9079 and 27637 to	
25303	2641	Under Driver Driving Pulley Shaft Screw					1		27639	35
		Bearing Ball Case (left) Friction Stud			4 5		27642		Under Driver Treadle complete for 27643,	
201 2-	==00	Ball, size ¼ in., for 27760per 100	1.00			·			Nos. 2878, 9082, 27636 and four wood	
26151	აარრ	Screw Driver (Accessories)	10				• .		screws 1 in. No. 16	45

NO.	PLATE	NAME	EACH		/			NO.	PLATE	NAME EACH
27643		Under Driver Treadle and Pitman com-			• !.	•		27763	2641	Under Driver Driving Pulley Shaft Screw Bearing Ball Case (left) Friction Stud
		plete for 27645 and 27771, Nos. 27640 and 27642\$	80		į					Ball Plate Washer\$ 01
27644		Under Driver Transmitter complete for	00		ĺ			27764	2641	Under Driver Driving Pulley Shaft Screw
2.011		27645, Nos. 138E, 356C, 427E, 649E,			.					Bearing Ball Case (right) for 27765 20
		1508E, 12178, 27474, 27483, 27485,			į.					
		27497, 27508, 27509, 27630, 27631,	٠.							Nos. 27765 to 27767 for 27770.
		27633 to 27635, 41338, two 127E and			:			27765	. —	Under Driver Driving Pulley Shaft Screw
		four wood screws $1\frac{1}{2}$ in. No. 16	3 00							Bearing Ball Case (right) complete,
27645		Under Driver, lever pressure, three speed,								Nos. 27758, 27764 and eight 25303 30
		right hand (oil controlling pulley) com-			. 4			27766	2640	• • • • • • • • • • • • • • • • • • • •
		plete, Nos. 27070, 27643 and 27644	4 00					. 27767	2640	" " Lever with 27768 and two
27739	5571				.			27768	0640	27878: 35
		for 41438	05		į			21108	2042	Under Driver Lever Brake (leather, two pieces) for 27767
		Nos. 27750 to 27757 for 27770.	:					27769	2642	pieces) for 27767
97750	0040	The day Duissay Cone Bulley (magazed) two						27770		Under Driver Transmitter complete for
27750	2040	Under Driver Cone Pulley (grooved) two speed, 3¾ in. and 5¼ in. diam., with			4.	1				27771, Nos. 348E, 1092E, 1093C, 1507E,
		878p and 12459	60		(1513E, 2718, 27750 to 27752, 27754 to
27751	2641	Under Driver Driving Pulley Shaft Ball	00		i					27757, 27760, 27765 to 27767, 27769,
21101	2011	Bearing Collar	25							two each 1143c, 27753, 27795, three
27752	2641	Under Driver Driving Pulley Shaft Ball		• • • • • • • • • • • • • • • • • • • •	٠,					wood screws 2 in. No. 16 and twenty-
		Bearing Collar Pin	04		: •					two 25303 3 00
27753	2641	Under Driver Cone Pulley Ball Bearing			4			27771	· 	(
		Adjusting Ring	15		3.15					two speed, right hand, complete, Nos.
27754	2641	Under Driver Driving Pulley Shaft Screw								27070, 27643 and 27770 4 00
		Bearing Ball Case (left) Friction Stud						21195		Under Driver Cone Pulley Ball Bearing
		Extension Pin	02						*	Adjusting Ring Set Screw Washer for 27770 per 100 25
27755	2640	Under Driver Dress Guard (right hand). " " " Driving Pulley (grooved)	10				-	27878	2642	27770 per 100 25 Under Driver Lever Brake Rivet for 27767 01
27756	2640	Billing I die, (grooted)	60					27940	5571	
27757	2641	6 in. diam., with 315c, 7958 and 27598. Under Driver Driving Pulley Shaft	60		!				0011	for 41438
27758	2641	" " Ball						29599	5584	Looper (right hand) and Spreader Lever
21100	2011	Safety Washer for 27760 and 27765	01							Connection Oil Tube Packing (felt) for
27759	2641	Under Driver Driving Pulley Shaft Screw								42106per 100 25
		Bearing Ball Case (left) for 27760	20	•				35095	5566	Tweezers, 6 in. (Accessories)
27760		Under Driver Driving Pulley Shaft Screw						36563	5566	Oiler (copper plated) with 36564 (Ac-
		Bearing Ball Case (left) complete for			- I					cessories)
		27770, Nos. 27758, 27759, 27761 to			1			36564		Oiler Spout, 5 in. long, for 36563 06
		27763 and twelve 25303	50		ı.			39541	5586	Presser Foot Screw Washer
		Nos. 27761 to 27763 for 27760.			1.	TT'		40247	5544	Needle Bar Connecting Link Hinge Pin 05
97721	9641				4	*		41338	362	Under Driver Lever for 27644
27761	2041	Under Driver Driving Pulley Shaft Screw Bearing Ball Case (left) Friction Stud.	10		. 1					Nos. 41393 to 41396 for 41397.
27762	96/1	Under Driver Driving Pulley Shaft Screw	10					41393	5570	Spool Holder Bracket with two 1143c 1 00
21102	2041 :	Bearing Ball Case (left) Friction Stud	1		¥ 1	į.	1.5	41394	5570	" " Shaft
		Ball Plate	05:		- 4			41395	5570	" " Centre Stud 10
		A-MAL A AWUV	0.0		- 15					

NO.	PLATE	NAME	EACH
41396	5570	Spool Holder Shaft Cone 8064 with 193c.\$	10
41397	5570	Spool Holder complete, Nos. 41393, 41394	
		and two each 41395, 41396 and wood	
		screws 1¼ in. No. 12	1 75
41434	5571	Thread Unwinder Spool Rest for 41435	40
41435		." " " 41434 with	
		1149c and three each 155c and 27623,	
		for 41438	75
41438	5571	Thread Unwinder complete, for three	
,		large spools or three large cones of	
		thread, Nos. 27940, 41435, 41632, 41640	
		and three each 27739, 41514 and wood	
		screws 1 in. No. 12	2 30
41514	5571	Thread Unwinder Spool Weight, 4 in.	
		diam., with 41515, for 41438	15
41515	5586	Thread Unwinder Spool Weight Centre	
		Pin for 41514	05
41569	5586	Thread Unwinder Thread Guard Eyelet	00
		for 41632	02
41632	5571	Thread Unwinder Thread Guard with	. 40
		208E and three 41569, for 41438	40
		Nos. 41637 to 41639 for 41640.	
41637	5571	Thread Unwinder Thread Guard Rod	
1100.	00.2	(lower)	10
41638	5571	Thread Unwinder Thread Guard Rod	
		(upper)	15
41639	5571	Thread Unwinder Thread Guard Rod	
		Coupling with two 456c	20
41640		Thread Unwinder Thread Guard Rod	
		complete, 30 in. long, for 41438, Nos.	
		41637 to 41639	45
42001	5576	Balance Wheel with 424c and 1354c	1 00
-42002	5526	Cloth Plate for 42107	3.00
42003	5526	" Extension (lower) for 42107	3 00
42005	5526	" Lock Spring for 42107	15
42007	5578	Feed Bar Hinge Pin	15
42008	5578	" Connecting Rod with 42009 and two	en
		1057E	. 60
*42009		Feed Connecting Rod Cap for 42008	1 00
42011	5578	" Eccentric with two 453c	1 00
42012	5578	" Lifting Eccentric with two 462c	1 50
42013	5578	" " Connection	1 00
42014		" Regulator with 233p and two 1259c. " Connection with 1012E	1 00
42015	5578	Connection with 10122:	60
42016		Hinge Butt	50
42019	5588	" Rock Shaft for 42020	90

NO.	PLATE	- NAME	EACH
42020		Feed Rock Shaft complete, Nos. 42019	
		and 42021.	8 85
42021	5578	Feed Rock Shaft Crank with 157E, for	. 00
*42022		42020	35
42022		Frame	12 00
		Rotary Shait	2 00
42024	5576	Bushing (front)	35
42025	5579	and 1375c Crank with 1259c	2 00
42026	5576	Frame Rotary Shaft Flanged Bushing	2 00
42028	.5526	(back)	60
42029	-5576	Frame Side Cover (right) hinged	40
42045	5582	TOP COVEL.	2 50
42051		Presser Lever Hinge Stud	50
42052	5579 5579	Looper (left hand) Lever with 209H.	3 00
42052	5579 5579	Connecting Link	75
42054	5544		125
42055	5544	Needle Bar	75
42055	5544	Connecting Link	1 25
42007	3344	" " Rod with 42050	
*42059		42076 and four 1057E	1 50
42009		Looper (right hand) and Spreader Lever	•
*42059		Connection Cap (upper) for 42075	35
*42059		Needle Bar Connecting Rod Cap (upper) for 42057.	35
42061	5544	Needle Bar Connecting Bracket with 187p	99
42066	5544	and 223F.	1 00
42069	5576	Needle Guard	40
42070	5584	Presser Lever	2 50
42070	5584	Lifter	20
42072	5584	opring.	05
42073	5582	Spreader	2 50
42015	0082	Looper (right hand) and Spreader Lever with 1259c	3 50
42074	5582	Looper (right hand) and Spreader Lever Ball Stud	
42074	5582	Needle Bar Crank (back) Ball Stud	75
42075	5582	Looper (right hand) and Spreader Lever	75
		Connection with 42059, 42076 and four 1057E	1 -0
*42076		Looper (right hand) and Spreader Lever	1 50
		Connection Cap (lower) for 42075	
*42076	 .	Needle Bar Connecting Rod Cap (lower)	35
		for 42057	35
42077	5584	Looper (right hand) and Spreader Lever	-0
7		Connection Guide	75

- NO.	PLATE	NAME	SACH
42077	5584	Needle Bar Connecting Rod Guide\$	75
42078	5584	Looper (right hand) and Spreader Lever	
12010	000-	Hinge Pin	25
42079	5579	Feed Rock Shaft Hinge Pin Bushing	50
42079	5579	Looper (right hand) and Spreader Lever	
12010	00.7	Hinge Pin Bushing	50
42082	5585	Tension (needle thread) Thread Guide	-50
42083		Thread (looper, left hand) Eyelet	40
42084		" " " Tube	30
42086	5564	Machine Base with three wood screws	
4.		1¼ in. No. 12 and four each 935D, 4718	
1		and 42088	2 00
42088	5586	Machine Cushion (felt) for 42086	02
42089	5566	Wrench for 1324, 1374 and 1629 (Ac-	
		cessories)	. 10
42090	5566	Threading Wire (Accessories)	03
42091	5584	Looper (right hand) obsolete, use 42166.	2 25
42092	5585	Thread (looper, right hand) Eyelet,	
		obsolete, use 42127	45
42093	5585	Thread (looper, right hand) Staple	50
42094	5526	Feed Eccentric Cover	25
42096	5585	Thread (needle) Eyelet	25
42098	5579	Feed Rock Shaft Hinge Pin	25
42102	5582	" Eccentric Cover Holder	2 00
42103	3 5544	Needle Bar Crank (back) with 1258c and	75
		two 1259c	75
4210	4 5544	Needle Bar Crank (front) with 904c,	75
		1258c and 1259c	50
4210	-	Needle Bar Crank Shaft	00
4210	6 5584	Looper (right hand) and Spreader Lever	١.
		Connection Oil Tube and Bracket with	50
		29599	.00
4210	7 ——	Cloth Plate complete, Nos. 42002, 42003, 42005, 42108, two 236p and five 229p	6 50
	00	Cloth Plate Extension (upper) for 42107.	20
4210		Looper (left hand)	2 00
4211		Needle Bar Thread Retainer Bracket	75
4211		Thread (looper, right hand) Take-up	35
4212			50
4212	8 5588	•	
-	Nos		
4213	0 5586		75 40
4213	1 5586		40
4213	32 5586	" " Spring	03
4213	33 —	Foot Lifter complete, Nos. 1301p, 4885,	
	•	6439, 42130 to 42132 and two each	
		1148F, 1229c and 1547p	2 50

NO.	PLATE	NAME	EACE	ſ
42142	5564	Lifting Lever Connecting Rod for 42144.\$	05	ó
42143	5564	Rock Shaft complete for 42144, Nos. 2763,		
		2768, 6337, 7125 and two each 2770 and		
		12242	1 28	5
42144		Knee Lifter complete, Nos. 1301b, 42130		
		to 42132, 42142, 42143 and two each		
		1148F, 1229c and 1547D	2 78	5
42160	5585	Presser Foot Spring Adjusting Pin for		
		42198	08	-
42166	5582	Looper (right hand)	2 2	_
42191	5540	Feed Dog, obsolete	7	-
42192	5540	Frame Side Cover (right) Lock Spring	2.	_
42193	5588	" " (left) with 19045	2.	-
42194	5540	Guide	1 2	_
42195	5588	Needle Guard Holder	3 0	-
42196	-	Presser Foot Body for 42198	3 5	
42197		". " Plate for 42198	2 0	0
42198	5540	Presser Foot (spring hinged) complete,		
		Nos. 464c, 9320, 14058, 42160, 42196		
		and 42197	46	_
42199	5540	Throat Plate for 42289	1 3	-
42205	5588	Feed Bar with 1253c	2 5	-
*42251		Arm with two each 462c and 42253	12 0	-
42253	5544	Needle Bar Bushing for 42251	2	_
42289	5540	Feed Dog		5
42290	5578	" Regulating Screw Stud Washer	0	5
4236	5 5585	Frame Rotary Shaft Flanged Bushing		
		(back) Oil Pad (braided cotton) long	0	1
42366	5585	Frame Rotary Shaft Flanged Bushing		
		(back) Oil Pad (braided cotton) short.	0	1
4236	5585	Frame Rotary Shaft Front Bearing Oil	_	
		Pad (braided cotton)	0	1

PLATE 362-ONE-FOURTH SIZE

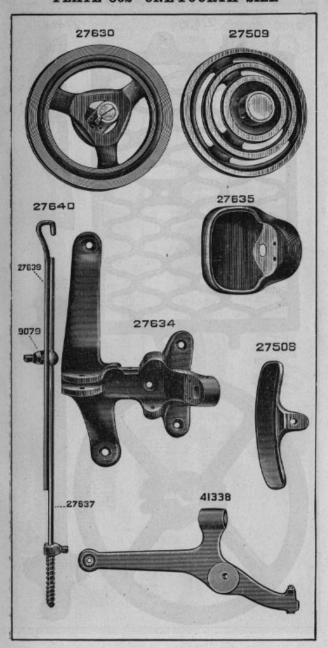


PLATE 1101-FULL SIZE

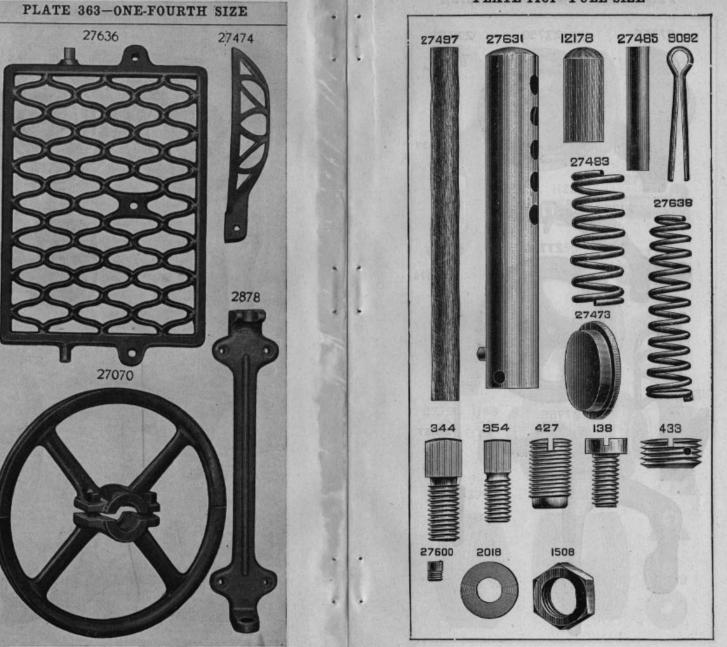


PLATE 2640-ONE-FOURTH SIZE

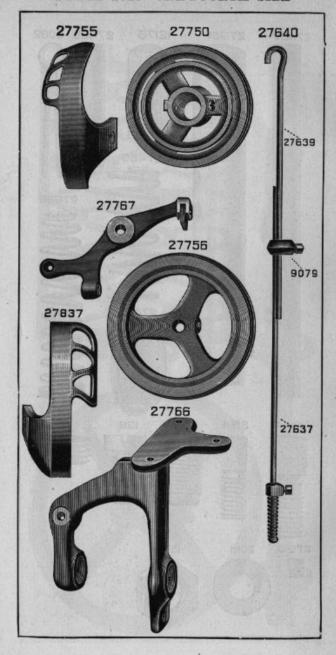


PLATE 2641-FULL SIZE

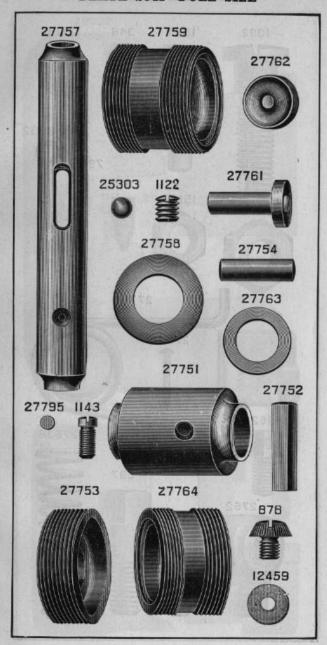


PLATE 2642-FULL SIZE

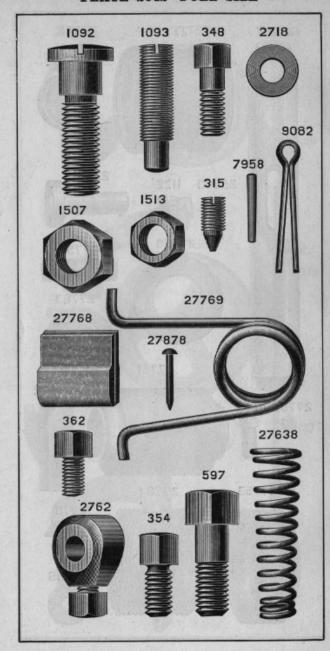


PLATE 5526-ONE-HALF SIZE

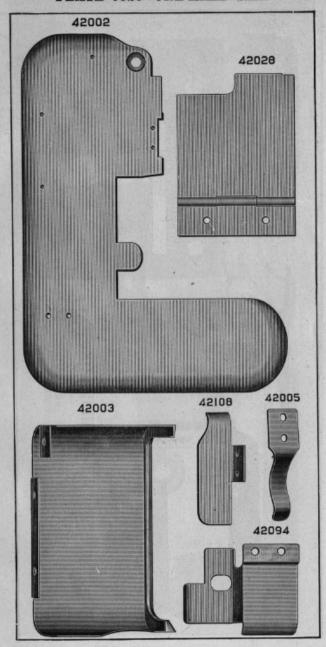


PLATE 5540-FULL SIZE .

PLATE 5544-FULL SIZE

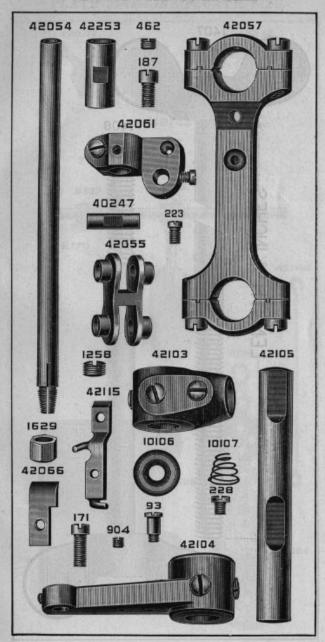


PLATE 5563-FULL SIZE

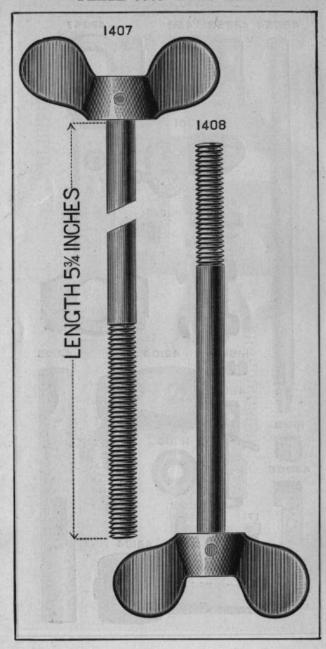


PLATE 5564-ONE-FOURTH SIZE

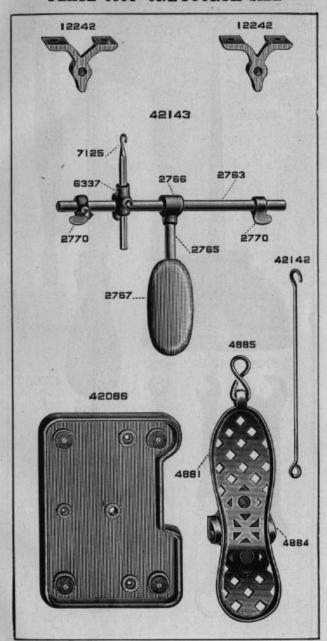


PLATE 5566-ONE-HALF SIZE 36563 26151 35095 36564---8908 42089 4822 42090 4882 4883

PLATE 5570-ONE-HALF SIZE

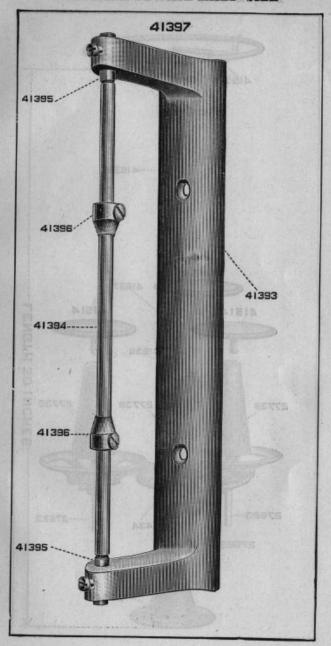


PLATE 5571-ONE-FOURTH SIZE

